

# SWAGE FITTINGS






# SWAGE FITTINGS

CABLE SIZE	DUPLEX SLEEVES			DUPLEX STOPS	
	Aluminum Weight 1000 Pieces/Pounds	Copper Weight 1000 Pieces/Pounds	Stainless Weight 1000 Pieces/lbs	Aluminum Weight 1000 Pieces/Pounds	Copper Weight 1000 Pieces/Pounds
1/32"	–	1.0	0.5	–	0.75
3/64"	0.7	2.0	1.5	–	1.5
1/16"	1.0	3.0	1.5	0.83	2.0
5/64"	2.0	–	–	–	–
3/32"	3.0	5.0	2.3	3.0	8.0
1/8"	6.0	17.0	3.8	3.0	10.0
1/8-3/16"	5.2	–	–	–	–
5/32"	9.5	23.0	14.0	4.8	13.0
3/16"	16.0	49.0	21.0	5.0	12.0
7/32"	21.0	50.0	31.0	–	20.0
1/4"	27.0	78.0	44.0	21.0	60.0
5/16"	48.0	114.0	57.0	25.0	65.0
3/8"	65.0	153.0	–	28.0	75.0
7/16"	115.0	302.0	–		
1/2"	172.0	410.0	–		
9/16"	–	551.0	–		
5/8"	–	802.0	–		

## DUPLEX SLEEVES AND STOPS - DOMESTIC

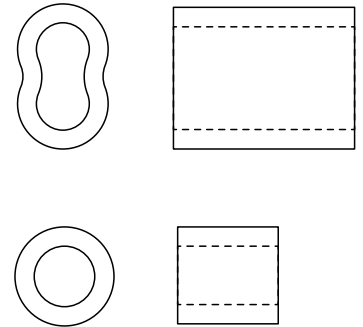


Aluminum, Copper, (Plain, Zinc-plated, Tin-plated) & Stainless Steel (Type 304)

Read important warnings and information on the inside back cover of this catalog titled Cautions.

SIZE	FLEMISH EYE SWAGING SLEEVE DIMENSION (INCH)					MAX. AFTER SWAGE DIMENSIONS INCH	WEIGHT KGS/100 PCS
	A	B	D	E	C		
3/8"	1.50	0.91	0.47	0.39	0.66	0.75	6.36
1/2"	2.00	1.22	0.63	0.56	0.91	1.01	13.00
5/8"	2.75	1.47	0.75	0.63	1.09	1.24	26.00
3/4"	3.19	1.72	0.91	0.84	1.28	1.46	40.00
7/8"	3.56	2.03	1.03	1.00	1.53	1.68	60.00
1"	4.00	2.28	1.16	1.13	1.72	1.93	89.00

## FLEMISH EYE SWAGING SLEEVE



Self Colored