



STAINLESS STEEL WIRE ROPES



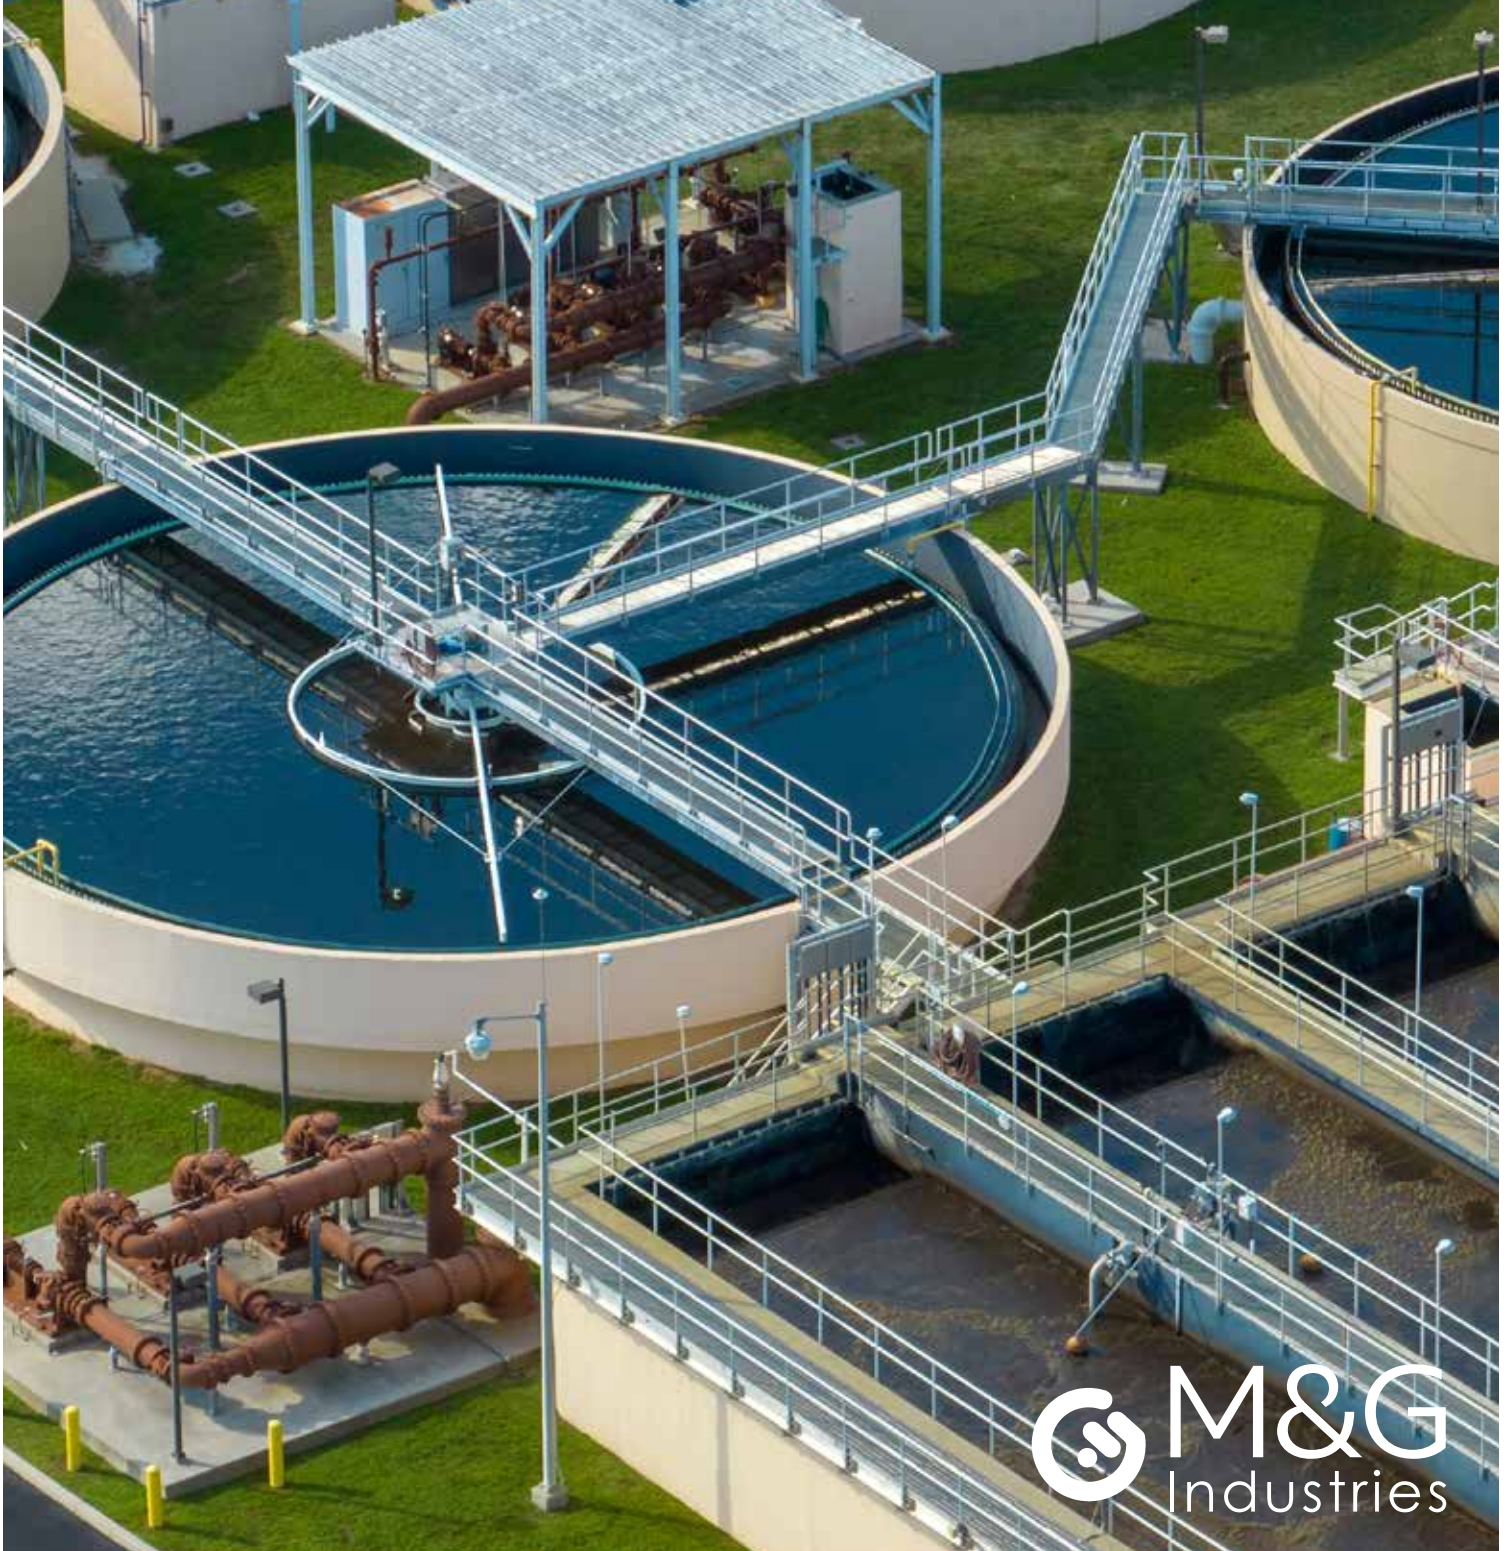


SIZE ROPE DIAMETER	6X19/25 STAINLESS STEEL WIRE ROPE - TYPE 304		6X36 STAINLESS STEEL WIRE ROPE - TYPE 304	
	Approx. Weight per Feet in Pounds	Min. Breaking Strength in Pounds	Approx. Weight per Feet in Pounds	Min. Breaking Strength in Pounds
.030"	0.7	110	-	-
3/64"	4.2	270	-	-
1/16"	7.5	480	7.5	480
5/64"	11.0	650	11.0	650
3/32"	16.0	920	17.0	920
1/8"	28.0	1,760	29.0	1,760
5/32"	43.0	2,400	45.0	2,400
3/16"	62.0	3,700	65.0	3,700
7/32"	86.0	5,000	86.0	5,000
1/4"	106.0	6,400	110.0	6,400
9/32"	-	-	150.0	7,800
5/16"	173.0	9,000	173.0	9,000
3/8"	243.0	12,000	243.0	12,000

TYPE 304 WIRE ROPE / STAINLESS STEEL



6x19/25 Stainless Steel Wire Rope



6x36 Stainless Steel Wire Rope

According to Federal Specifications RR-W-410(current).
 All material produced to according to ASTM standards A492
 Read important warnings and information on the inside back cover of
 this catalog titled Cautions.



Our stainless steel has added corrosion resistance. This characteristic makes stainless steel perfect for high moisture and acidic environments, such as in marine rigging applications or job sites with harsh chemicals like chlorine.